

Premium Stackable Shaking Incubators



ZWYR-D2402



Description:

This ZWYR-D Series shaking incubators can be stacked up to three units high, providing laboratory professionals tripled culture capacity, while still only occupying the same "footprint" of a single shaker. All models feature an insulated, fold-down door with double-layer glass window for high visibility. On all refrigerating models, microprocessor controller provides unmatched versatility by enable users to create personalized program (with up to 9 segments, with cycling) to automate changes to function parameters.



ZWYR-D2401 With P5010



ZWYR-D2403



Features:

- Stackable up to three units for maximum space savings.
- 5.6" LCD 640x480 touch screen panel clearly indicates all parameters in one page display and enables all complicated program settings intuitively just with finger tips.
- Wide-view fold-down door with door handle, and ergonomic sliding-out shaking platform provide convenient access to your experiment products.
- Direct beltless driving system is both durable and economical, maintenance free, allows extended speed ranges from 30 to 300 RPM, ± 1 RPM with minimized vibration, even when shakers are stacked of three high. The shaking diameter can be changed from 1-50mm for optimum oxygenation and nutrient mixing and agitation in from small to large flasks.
- The top of the casing can be further used as a work area for locating small items of lab equipment etc.
- The incubator casing is made of heavy-gauge cold-rolled steel; together with high graded #304 stainless steel inner chambers with covered corners make it easy to clean with mild detergent. Chamber is tall enough to hold 2L Erlenmeyer flasks.
- The ceiling of the unit can be upgraded and fitted with LED lighting kit for cultivation of phototrophic organisms. Mono cool white, or Red & Blue dual light colors are possible and the intensity of each color can be independently controlled and programmed to simulate day/night cycles, perfect for plant cell culture.
- Robust brushless DC motor enables shaking motion quiet and smooth, even when unit is operating at top speed with maximum workload.
- Non-volatile memory saves settings during a power outage and automatically restarts the unit after power is restored.
- For data recording, the units are equipped with a built-in thermo printer as standard, so that operators could check how the performance parameters vary according to specified process without having to be on site.
- **New** Internal UV light as standard
- Predrilled platform as standard configuration, flask clamps excluded.
- For a comfortable working height, the base stands are available in 500mm high.

Flask (ml)	50ml	100ml	250ml	500ml	750ml	1000ml	2000ml
ZWYR-D2401/D1401	90	50	38	26	15	15	8
ZWYR-D2402	180	100	76	52	30	30	16
ZWYR-D2403	270	150	114	78	45	45	24


Specifications:

Model	ZWYR-D1401	ZWYR-D2401	ZWYR-D2402	ZWYR-D2403
Control	P.I.D Microprocessor			
Control Mode	Fix Value or Program (up to 9 Segments)			
Control Panel	LCD Touch Screen			
Air Convection	Forced			
Shaking Mode	Orbit			
Volume/ Compartment (L)	190			
Ambient Temperature(°C)	10-35			
Shaking Speed (rpm)	30-300			
Stroke (mm)	Ø1-50 Stepless Adjustable			
Temperature Range (°C)	A+5-60	4-60#		
Temperature Accuracy (°C)	0.1			
Temperature Uniformity (°C)	±1°C@37°C			
Timer	1 to 9999 mins			
Tray (mm) (WxD)	800x430			
Tray Included	1	2	3	
Inner Dimensions (mm) (WxDxH)	920x532x395			
Exterior Dimensions (mm) (WxDxH)	1300x930x735	1300x930x1315	1300x930x1895	
Packing Dimensions (mm) (WxDxH)	1420x1050x905	1420x1050x1480	1420x1050x2060	
Net/Gross Weight (kg)	250/290	430/500	630/730	
Power (W)	1200	2400	3600	
Electricity	220-240V 50/60 Hz			
Approval	CE, ISO			
Security	Over-temperature Protection, Compressor Overload Protection, Electrical Leakage Protection			
Additional	Built-in Printer, RS485 COM Kit (Option), LED Lighting Control Kit (Option), Base Stand(Option)			

P5011	Lighting Control Kit (Option)
Light Source	LED
Light Color*	50% Red, 50% Blue; Or 100% Cool White
Spectrum	Red: 640-660nm, Blue: 430-450nm
Light Intensity	13,000 Lux
Control Range	Individually, from 0-100% output
Control Mode	Fixed Value & Programmable
Panel Dimensions	890x500x10mm
Power	300W



P5011RB: (50% Red, 50% Blue)

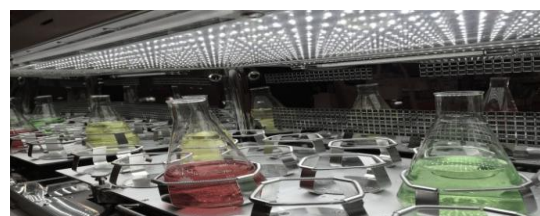

P5011W: (100% Cool White)

*Fully customized color combinations are available, contact Labwit representatives for more information.


Min. Operating Temperature: 15 ° C when Photosynthetic Lighting option is applied.

Ordering Information:

Part Number	Descriptions
ZWYR-D2401	ZWYR-D2401, 190Lx1, Premium Stackable Shaking Incubator, Single, 4-60°C, 30-300rpm
ZWYR-D2402	ZWYR-D2402, 190Lx2, Premium Stackable Shaking Incubator, Double, 4-60°C, 30-300rpm
ZWYR-D2403	ZWYR-D2403, 190Lx3, Premium Stackable Shaking Incubator, Triple, 4-60°C, 30-300rpm
P5010	Base Stand for ZWYR-D2401, 1300*800*500mm
P5011RB	LED Lighting Panel, For ZWYR-D2401/D2402/D2403, ZWYC-290A, Red & Blue
P5011W	LED Lighting Panel, For ZWYR-D2401/D2402/D2403, ZWYC-290A, White
P8010	Tube Rack S/S
P8012	Clamp for 96 Well Plate, S/S
P8017	Sticky Mat, 20 x 20cm
P8021	O Clamp, S/S, for 50ml Flask, with Spring Retainer
P8022	O Clamp, S/S, for 100ml Flask, with Spring Retainer
P8023	O Clamp, S/S, for 250ml Flask, with Spring Retainer
P8024	O Clamp, S/S, for 500ml Flask, with Spring Retainer
P8025	O Clamp, S/S, for 750ml Flask, with Spring Retainer
P8026	O Clamp, S/S, for 1000ml Flask, with Spring Retainer
P8027	O Clamp, S/S, for 2000ml Flask, with Spring Retainer



O Clamps



P8017 Sticky Mat



P8010

Labwit quality assurance program demands the continuous assessment and improvement of all Labwit products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact Labwit or their representatives if you require more details